


newline

Connect. Create. Collaborate.

TRU TOUCH NT Series

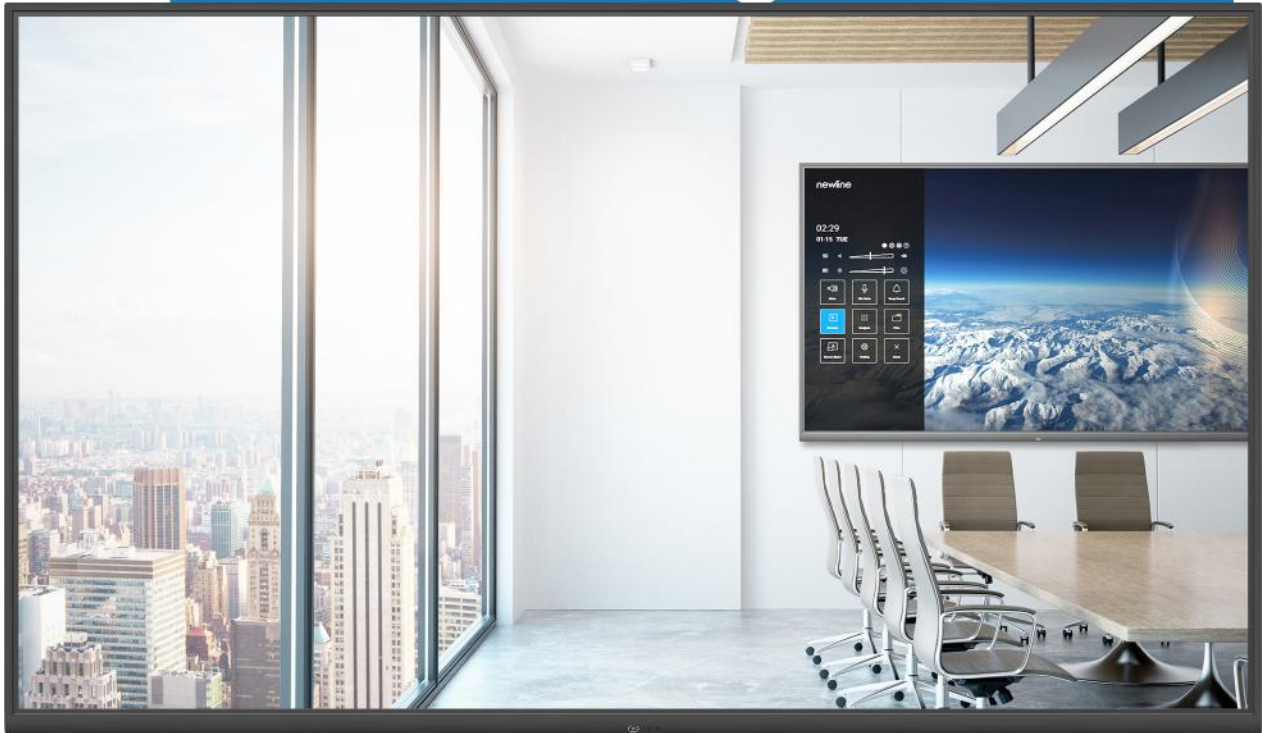

COMMERCIAL GRADE DISPLAYS

CAST BROADCAST

COMMERCIAL GRADE DISPLAYS

LARGE-SCALE COLLABORATION FOR EFFECTIVE AND STREAMLINED MEETINGS

The NT Series is an innovative line of non-touch displays designed for large-scale collaboration. Created with your team's needs in mind, the NT Series brings you all the collaborative tools a TV screen lacks.

Streamline your meetings and presentations by focusing on just the tools you need to succeed.



Superior Image Quality
with 4K UHD Resolution



Remote Control from
provided device or app




Vivid and brighter images
with Wide Color Gamut



Blue Light Filter for a
safe Viewing Experience



Built-in Mic Array for
conferences and voice
control

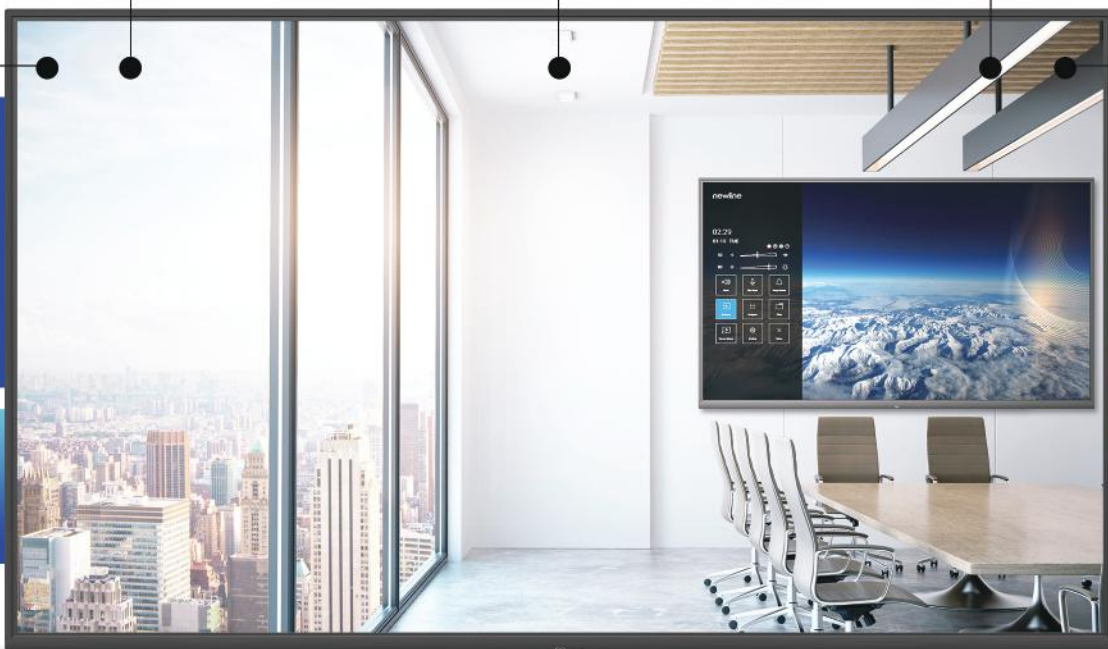

INTUITIVE & IMMERSIVE INTERFACE



Superior
Image Quality



Remote Display
Management



Wireless
Casting



Non
Touch



Cloud
Access



Multiple
Connections



Remote
Control



Device
Compatibility

REMOTE CONTROL



PRODUCT SPECIFICATION

MODEL NAME	TT-8519NT	TT-9819NT
DISPLAY		
ACTIVE SCREEN SIZE	1872X1053MM	2159X1214MM
PANEL SIZE	85"	98"
BACKLIGHT	LED	LED
DISPLAY AREA	1872X1053MM	2159X1214MM
DISPLAY RATIO	16:9	16:9
RESOLUTION	3840X2160	3840X2160
DISPLAY COLORS	10BIT(D), 1.07BILLION COLORS	10BIT(D), 1.07BILLION COLORS
LCD BRIGHTNESS	≥500 CD/M ²	≥500 CD/M ²
CONTRAST	5000:1	5000:1
RESPONSE TIME	8 MS	6 MS
VIEWING ANGLE	178°	178°
LIFE TIME	≥50000 HOURS	≥50000 HOURS
SMART SYSTEM		
CHIPSET	HI3751 V810	HI3751 V810
CPU	DUAL-CORE CORTEX A73 AND DUAL-CORE CORTEX A53	DUAL-CORE CORTEX A73 AND DUAL-CORE CORTEX A53
GPU	QUAD-CORE MALIG51 GPU	QUAD-CORE MALIG51 GPU
RAM	3GB DDR4	3GB DDR4
ROM	16GB	16GB
ANDROID VERSION	8.0	8.0
MULTIMEDIA FILE FORMATS SUPPORT	VIDEO: AVS, AVS+, H263, H264, H265, MPEG-1, MPEG-2, MPEG-4, MPEG-4, VC1, VP8, VP9, MJPEG AUDIO: AAC, ADPCM, DRA, FLAC, MID, MPEG, PCM, VORBIS IMAGE: JPEG, BMP, PNG	VIDEO: AVS, AVS+, H263, H264, H265, MPEG-1, MPEG-2, MPEG-4, MPEG-4, VC1, VP8, VP9, MJPEGAUDIO: AAC, ADPCM, DRA, FLAC, MID, MPEG, PCM VORBIS IMAGE: JPEG, BMP, PNG
ELECTRICAL		
POWER CONSUMPTION	≤450W	≤700W
WORKING VOLTAGE	AC100-240V	AC100-240V
SPEAKER		
SPEAKER POSITION	FORWARD	FORWARD
RATED IMPEDANCE	6Ω ±15% AT 1000HZ	6Ω ±15% AT 1000HZ
FREQ.RESPONSE	FB-20KHZ/-10DB	FB-20KHZ/-10DB
OUTPUT S.P.L.	0DB~ -10DB	0DB~ -10DB
MAX.POWER OUTPUT	20W*2 (6Ω)	20W*2 (6Ω)
TRANSPORTATION/STORAGE		
STORAGE TEMPERATURE/HUMIDITY	15°C ~55°C / 20~90%RH (NON COAGULATION)	15°C ~55°C / 20~90%RH (NON COAGULATION)
WORKING TEMPERATURE/HUMIDITY	0°C ~40°C / 20~80%RH (NON COAGULATION)	0°C ~40°C / 20~80%RH (NON COAGULATION)
INSTALLATION METHOD (OPTIONAL)	WALL-MOUNTED, MOBILE CART	WALL-MOUNTED, MOBILE CART
OUTLINE DIMENSION (WITHOUT WALL MOUNT BRACKET THICKNESS) (DECIMAL POINT IS ROUNDED OFF)	1967X1152X87MM	2212X1293X93MM
PACKING DIMENSION (DECIMAL POINT IS ROUNDED OFF)	2101X275X1272MM	2440X450X1570MM
NET WEIGHT	46.5±2KG	80±2KG
GROSS WEIGHT	64.5±2KG	133±2KG
VESA MOUNT INSTALLATION POSITION	800 X 400 MM	800 X 600 MM
CERTIFICATES		
REGULATIONS	BIS, FCC,ROHS, EMC,ERP,LVDS	
INTERNAL MICROPHONE		
CHIPSET	MT8516	MT8516
COMMUNICATION INTERFACE	USB,LINE-IN	USB,LINE-IN
SUPPLY VOLTAGE	18V	18V
TYPE	ANALOG MICROPHONE	ANALOG MICROPHONE
AUDIO SPEC.	16KHZ, 16BITS PCM, EXTENDABLE 24BITS, 48BITS	16KHZ, 16BITS PCM, EXTENDABLE 24BITS, 48BITS
ARRAY	6	6
ADAPTERIZATION DISTANCE	6~8M	6~8M
FUNCTION	ECHO CANCELLATION, BEAMFORMING,NOISE REDUCTION, REVERB REMOVAL	ECHO CANCELLATION, BEAMFORMING, NOISE REDUCTION, REVERB REMOVAL
SPECIALITY		
WIFI MODULE	PLUGGABLE WIFI MODULE 7668U	PLUGGABLE WIFI MODULE 7668U
MULTI-LANGUAGE	SUPPORT	SUPPORT
FIRMWARE UPDATE	USB,OTA	USB,OTA
STANDBY MODE	SUPPORT	SUPPORT
FRONT BUTTON	POWER BUTTONX1	POWER BUTTONX1
BACK BUTTON	ROCKER SWITCH FOR POWER UP, DOWN, LEFT, RIGHT, OK, RETURN, MENU	ROCKER SWITCH FOR POWER UP, DOWN, LEFT, RIGHT, OK, RETURN, MENU
BOOT TIME	≤35S	≤35S
STANDBY TIME	≤5S (WITHOUT OPS)	5S (WITHOUT OPS)
OPS-PC SLOT	AVAILABLE	AVAILABLE
PORTS		
FRONT PORT	N/A	N/A
REAR INPUT PORT	USB 3.0X4, HDMI4, USB 3.0 TYPE B (FOR TOUCH, PASSTHROUGH)X1, LAN INX1, RS232X1	USB 3.0X4, HDMI4, USB 3.0 TYPE B (FOR TOUCH, PASSTHROUGH)X1, LAN INX1, RS232X1
REAR OUTPUT PORT	LAN OUTX1, SPDIF OUTX1, EARPHONEX1	LAN OUTX1, SPDIF OUTX1, EARPHONEX1



CHENNAI
Room No. 202, 203, 211
No.37, Workafella, TTK Road, Alwarpet,
Chennai-600018, Tamil Nadu

GUJARAT
104, 1st Floor, Shilp Arista, Opposite
Stellar, Sindhu Bhavan Road, Thaltej,
Ahmedabad 380015, Gujarat

DELHI
Unit No. A-717, 7th Floor,
DLF Tower A, Jasola District Centre,
New Delhi- 110025

KOLKATA
RAIKVA Tower 3A, Ram Mohan
Mullick Garden Lane, 3rd Floor, Suit No - 309
Kolkata, West Bengal 700010

MUMBAI
1st Floor,B-107, Kanakia Wall Street,
Chakala, Andheri Kurla Road,
Andheri East Mumbai-400059, Maharashtra.



1-800-419-0309 | www.newlineinteractive.in